



List of papers

Proceedings of International Conference on Advancement in Nano Electronics & Communication Technologies (ICANCT – 2021)

[Design, Simulation and Analysis of Wearable 2.4 GHz U Shape Slotted Microstrip Patch Antenna for Wireless Body Area Network](#)

Authors: Umme Afruz, Md. Ahasan Kabir

Pages: 1-5

DOI: [10.47904/IJSKIT.11.3.2021.1-5](https://doi.org/10.47904/IJSKIT.11.3.2021.1-5)

[Download Full Paper](#)

[View Abstract](#)

[Experience Internet of Things by the Gateway of Smart Home Spectrum](#)

Authors: Devika Soni

Pages: 6-10

DOI: [10.47904/IJSKIT.11.3.2021.6-10](https://doi.org/10.47904/IJSKIT.11.3.2021.6-10)

[Download Full Paper](#)

[View Abstract](#)

[Automotive Health Monitoring System](#)

Authors: Simran Arora, Surbhi Sen, Sandeep Singh Rawat, Swati Arora

Pages: 11-16

DOI: [10.47904/IJSKIT.11.3.2021.11-16](https://doi.org/10.47904/IJSKIT.11.3.2021.11-16)

[Download Full Paper](#)

[View Abstract](#)

[Design and Analysis of LH Miniaturized Microstrip Filter Based on DNG](#)

Authors: Shubhi Jain, Gloria Joseph

Pages: 17-19

DOI: [10.47904/IJSKIT.11.3.2021.17-19](https://doi.org/10.47904/IJSKIT.11.3.2021.17-19)

[Download Full Paper](#)

[View Abstract](#)

[Effect of Buffer Layer on Cu \(In, Ga\)Se₂ Solar Cell Performance](#)

Authors: Satyendra Kumar, Swati Arora

Pages: 20-24

DOI: [10.47904/IJSKIT.11.3.2021.20-24](https://doi.org/10.47904/IJSKIT.11.3.2021.20-24)

[Download Full Paper](#)

[View Abstract](#)

[New Model for Effect of Fringing Fields on Radius of Circular Microstrip Antenna](#)

Authors: S.K. Bhatnagar

Pages: 25-28

DOI: [10.47904/IJSKIT.11.3.2021.25-28](https://doi.org/10.47904/IJSKIT.11.3.2021.25-28)

[Download Full Paper](#)

[View Abstract](#)

[A Review Paper on 5G Wireless Technology](#)

Authors: Suman Sharma, Richa Sharma, Kriti Sharma

Pages: 29-31



SKIT Research Journal



Authors: Rupanjali Meena, Praveen Kumar Jain

Pages: 32-34

DOI: [10.47904/IJSKIT.11.3.2021.32-34](https://doi.org/10.47904/IJSKIT.11.3.2021.32-34)

[Download Full Paper](#)

[View Abstract](#)

[A Review on Reconfigurable Antennas for 4G and 5G Wireless Communications](#)

Authors: Arpit Jain, Pallav Rawal

Pages: 35-38

DOI: [10.47904/IJSKIT.11.3.2021.35-38](https://doi.org/10.47904/IJSKIT.11.3.2021.35-38)

[Download Full Paper](#)

[View Abstract](#)

[Routing of Terahertz Channels in Reconfigurable DWDM Digitally Switched Network](#)

Authors: Aruna Rani, Manjit Singh Bhamrah, Sanjeev Dewra

Pages: 39-42

DOI: [10.47904/IJSKIT.11.3.2021.39-42](https://doi.org/10.47904/IJSKIT.11.3.2021.39-42)

[Download Full Paper](#)

[View Abstract](#)

[AI In Agriculture Using UAV to Detect Weeds](#)

Authors: Karanpreet Verma

Pages: 43-47

DOI: [10.47904/IJSKIT.11.3.2021.43-47](https://doi.org/10.47904/IJSKIT.11.3.2021.43-47)

[Download Full Paper](#)

[View Abstract](#)

[Design of Breast Model using Different Dielectric Materials and UWB Antenna for Tumor Detection](#)

Authors: Harshal Nigam, Monika Mathur, Mukesh Arora

Pages: 48-50

DOI: [10.47904/IJSKIT.11.3.2021.48-50](https://doi.org/10.47904/IJSKIT.11.3.2021.48-50)

[Download Full Paper](#)

[View Abstract](#)

[Reconfigurable RF MEMS PIFA Antenna: A Review Study](#)

Authors: Priyanka Jain, Shubhi Jain

Pages: 51-54

DOI: [10.47904/IJSKIT.11.3.2021.51-54](https://doi.org/10.47904/IJSKIT.11.3.2021.51-54)

[Download Full Paper](#)

[View Abstract](#)

SKIT Research Journal

ISSN (Print) 2278-2508 ISSN (Online) 2454-9673

Copyright ©2021 All rights reserved by [SKIT Jaipur](#)

Newsletter

Stay updated with our latest trends

Enter Email Address



Design of Breast Model using Different Dielectric Materials and UWB Antenna for Tumor Detection

Harshal Nigam, Monika Mathur, Mukesh Arora

Department of Electronics and Communication Engineering, Swami Keshvanand Institute of Technology, Management & Gramothan, Jaipur, Rajasthan (INDIA)

Email : hrshlnigam@gmail.com, monikamathur16@gmail.com

Received 13.02.2021, Received in revised form 18.03.2021, Accepted 04.04.2021

Abstract: A breast model has been proposed in this paper. The model is designed on CST Microwave studio. The outer layer is skin, then fat layer and then breast tissue layer is made of different dielectric constant materials. The tumor is taken as a sphere which is placed inside the breast at different positions for detection purpose. A novel antenna to detect breast cancer tumor is also proposed in this paper. The UWB antenna is designed in the frequency range 3.3-10.6 GHz. The antenna shows a return loss S_{11} less than -10 dB for the UWB frequency range and a maximum gain of 3.49 dB in this range. The designed UWB antennas can be placed on both sides of breast model such that the signal scattered by the breast tumor can be detected by the receiving antenna. The overall size of antenna is $20 \times 30 \text{ mm}^2$ and designed on FR4 substrate

Keywords: Breast cancer, Tumor Cells, Microstrip Antenna, UWB, Cancer Detection

1. INTRODUCTION

In 2018, by cancer research UK around, 17 million cancer cases were reported among them the major cancer were due to breast cancer, lung cancer and prostate cancer, this number is expected to be about 27.5 million by 2040. [1]

The breast cancer is mainly detected in woman of age group 25-40 so it is expected to detect the breast cancer initially so that it can be treated. [2-4]

The wireless systems having antenna are very much used for detection of breast cancer. There are many topologies of antenna systems that can be used for tumor inside breasts [5-6]

FCC has allocated a bandwidth of 3.1-10.6 GHz for commercial applications of Ultra-wide band. UWB systems have a higher bandwidth which points towards pulses of very small time duration, thus UWB pulses can be used for biomedical applications for visualization of tumor inside body without any destruction. [7-8]

The detection of tumor inside the breast can be detected by techniques such as MBI (Microwave breast imaging) [9-10]

The MBI technique involves the use of transmitter and receiver antennas and the transmitted signals from antenna are scattered due to

the presence of tumor as detected by received antenna and presence of tumor can be detected, to illustrate this technique first of all a breast model mimicking a real breast with skin, fat layer and breast tissues is modelled on the software and then keeping the antennas on both sides, the model is simulated. [11]

In this paper, first of all a UWB antenna is designed showing good return loss characteristics and a proper gain. The breast model is next designed on CST Microwave studio having different layers with proper dielectric properties so as to mimic a real breast. The tumor having a very high dielectric constant is also placed in the model. The future work will be to place the antennas on two sides of the model and to detect the presence of tumor for different positions and size of the tumor.

2. UWB ANTENNA DESIGN

The patch antenna has been designed to work on UWB frequency range as shown in Fig.1. The design has been simulated on FR4 substrate having dielectric constant of 4.4 and a thickness of 1.6 mm. The front view of the antenna is as shown in Fig. 1(a). The dimensions in mm are as given in Table 1. The back view is as shown in Fig. 1(b) where there is a partial ground plane to obtain UWB characteristics.

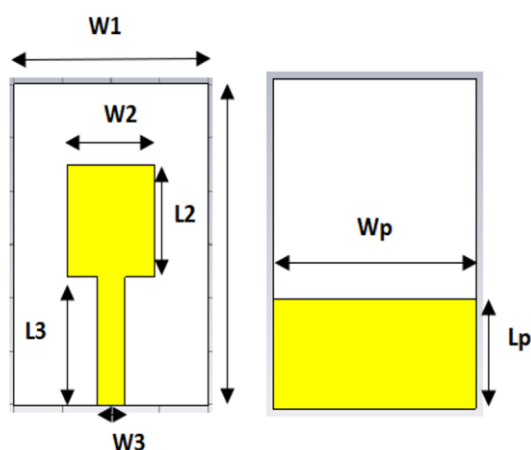


Fig.1 Front and back view of Antenna

The designed antenna is simulated on CST Microwave studio and it was observed that S11 (dB) return loss was less than -10 dB for UWB frequency range. The minimum return loss in the UWB range is observed at a frequency of 9.344 GHz. As seen in Fig. 2.

Table 1. Dimensions of Antenna (mm)

W1	20	L1	30
W2	9	L2	10.5
W3	2.9	L3	12
Wp	20	Lp	10

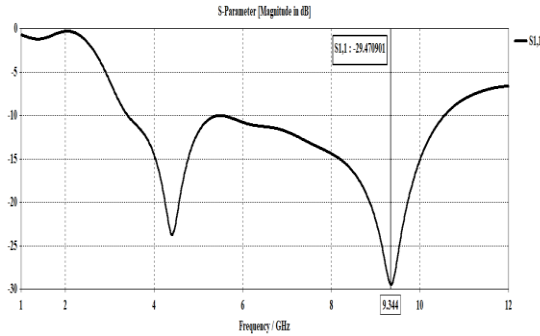


Fig.2. S11 vs frequency plot

The plot for gain is also simulated with frequency as in Fig. 3, it can be seen that a peak gain of 3.49 dB can be obtained at a frequency of 7.3 GHz in the UWB range.

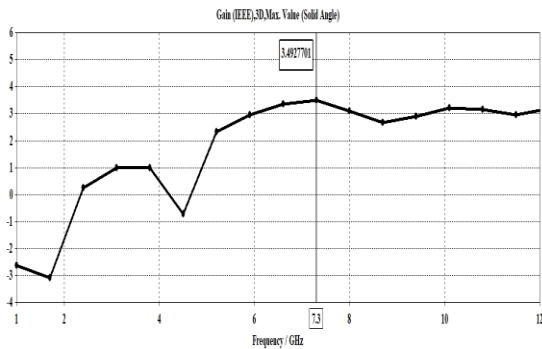


Fig.3 Gain vs Frequency plot

3. BREAST MODEL DESIGN

A breast model in conical form is also designed as shown in Fig.4. The model represents different layers of the breast including skin layer, fat layer, breast tissues and the presence of tumor. The above designed antennas can be placed on both sides of this model as a future work to detect the presence of tumor. The tumor position in the model can be varied along with the variation of the radius of the tumor.

The permittivity and conductivity for different layers of breast is also shown in Table 2. It can be observed that tumor has a very high dielectric which

scatters the transmitted signal, so the pattern of received signal changes and tumor can be detected.

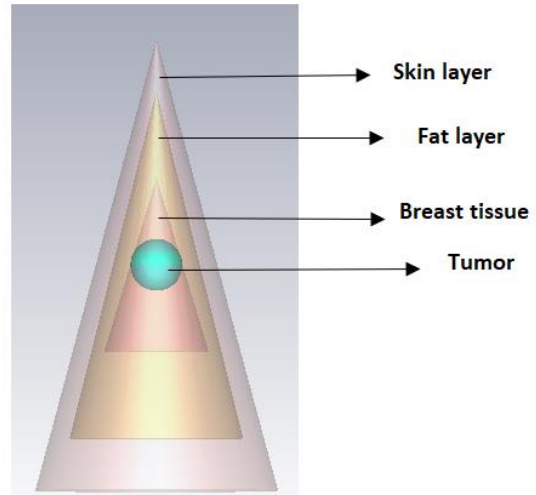


Fig.4. Breast model

Table 2. Permittivity and Conductivity of different layers

Material	Permittivity(ϵ_r)	Conductivity (S/m)
Skin	38	1.46
Fat	5.28	0.1
Breast tissue	4.49	0.59
Tumor	50	4

4. CONCLUSION

This paper depicts the design of a UWB antenna for tumor detection. The antenna is of small size and operated on UWB band that can be used for biomedical applications, apart from this a model of breast is also designed for detection. This model has got different layers as in a real breast and this can be used for future detection of tumor inside the breast.

7. REFERENCES

- [1] Cancer Research UK. <https://www.cancerresearchuk.org/health-professional/cancer-statistics/worldwidecancer> 2019
- [2] Rabia Caliskan, S., Gultekin, S., Uzer, D. and Dundar, O. (2015) A Microstrip Patch Antenna Design for Breast Cancer Detection. Procedia -Social and Behavioral Science 195,2905-2911,2015
- [3] Yu, Z.G., Jia, C.X., Geng, C.Z., Tang, J.H., Zhang, J. and Liu, L.Y. (2012) Risk Factors Related to Female Breast Cancer in Regions of Northeast China: A 1:3 Matched Case-Control Population-Based Study. Chinese Medical Journal , 125, 733-740.
- [4] Globocan (2004) Cancer Incidence, Mortality and Prevalence Worldwide. IARC Cancer Base No. 5. Version 2.0, IARC Press, Lyon. Miyakawa, M., Ishida, T. and Watanabe, M. (2004)
- [5] Aman Nag, Divesh mittal, Avneet Kaur, "THz Rectangular Slitted Microstrip Patch Antenna Design for Biomedical Applications, Security Purposes & Drug Detection", (2016).
- [6] Kumud Ranjan Jha and Satish K. Sharma, "Waveguide Integrated Microstrip Patch Antenna at THz Frequency" (2014).
- [7] Federal Communications Commission, "Revision of part 15 of the commission's rules regarding UWB transmission systems first order and report, FCC 02-48," Tech. Rep.,

- FCC, Washington, DC, USA, 2002.
- [8] C. Gilmore, P. Mojabi, A. Zakaria, S. Pistorius, and J. Lovetri, "On super-resolution with an experimental microwave tomography system," *IEEE Antennas and Wireless Propagation Letters*, vol. 9, pp. 393–396, 2010.
- [9] M. Miyakawa, T. Ishida, and M. Watanabe, "Imaging capability of an early stage breast tumor by CP-MCT.," *Conf. Proc. IEEE Eng. Med. Biol. Soc.*, vol. 2, pp. 1427–1430, 2004.
- [10] E. Praveen, B. Paulchamy, S. Mohanraj, and S. Mohan, "Design of 1X8 Phased Array Micro-strip Patch Antennas for Biomedical Applications," no. i, pp. 68–72, 2016.
- [11] S. Padhi, F. Liu, B. K. Li, N. Shuley, and S. Crozier, "On the accurate modeling of a complex antenna for breast tumor detection using a hybrid MOM/FDTD approach.," *Conf. Proc. IEEE Eng. Med. Biol. Soc.*, vol. 2007, pp. 6637–40, 2007.